
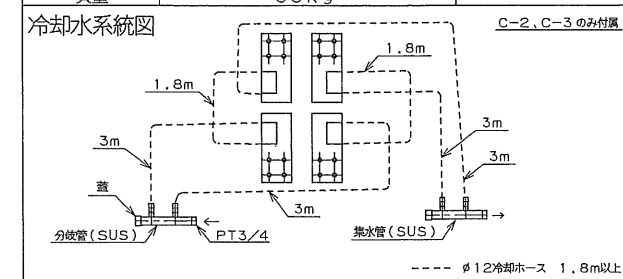



コンビ	C-0	C-1	C-2	C-3
冷却方式	自冷		水冷	
50/60Hz	2500A		7500A	
150/180Hz	—		5400A	
200Hz	—		4600A	
300Hz	—		4200A	
500Hz	—		3900A	
1000Hz	—		3200A	
2000Hz	—		2600A	
DC	—		7500A	
接続端子銀メッキ	有		有	
接続端子寸法	図1	図2	図1	図2
付属品	注意銘板	各1	各1	各1
	ON OFF銘板	各1	各1	各1
	集水管	—	一式	一式
	冷却ホース	—	—	—
	冷却水量	—	12 l/min	—
質量	65 kg			



名称	手動双極単投断路器	
	図番	FAB001D