
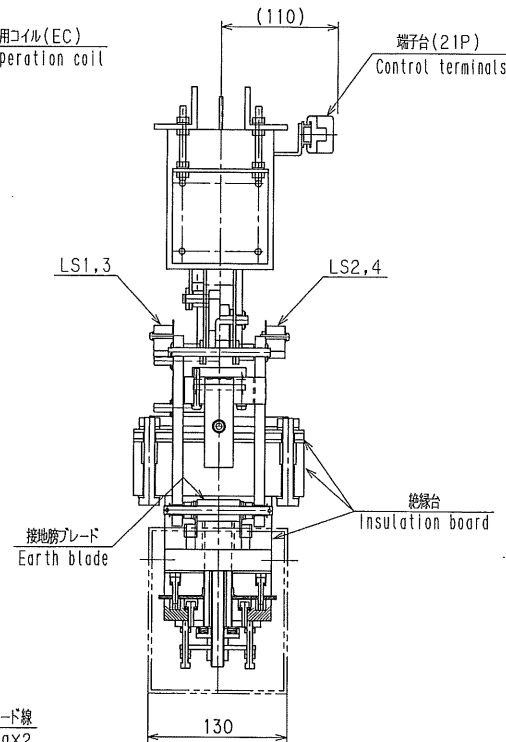
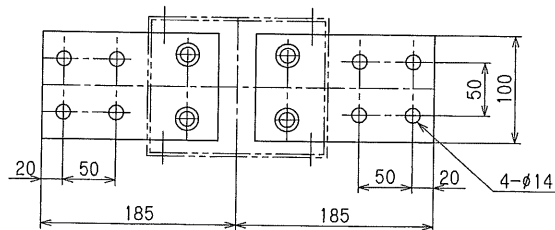
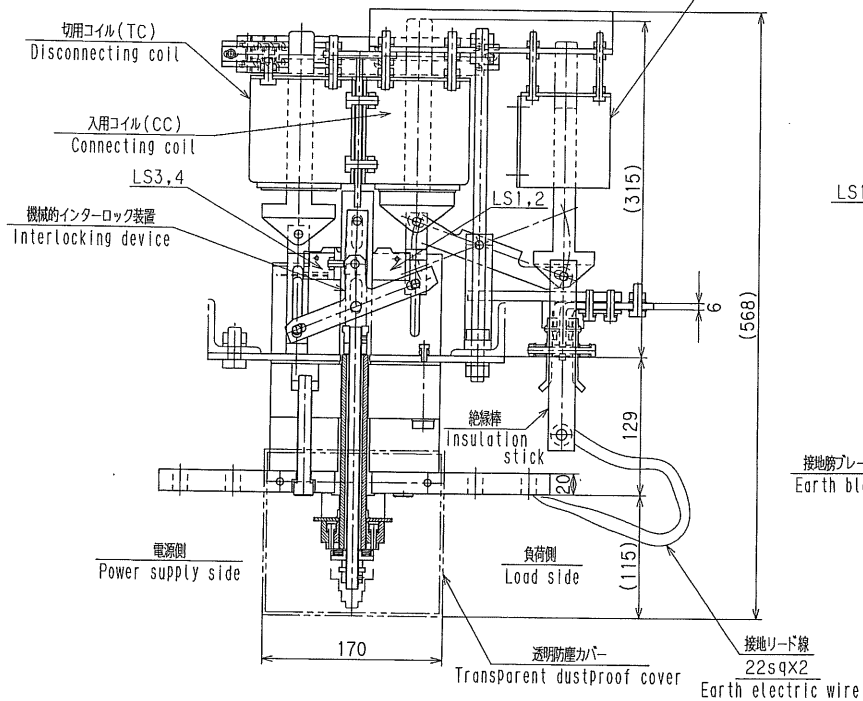


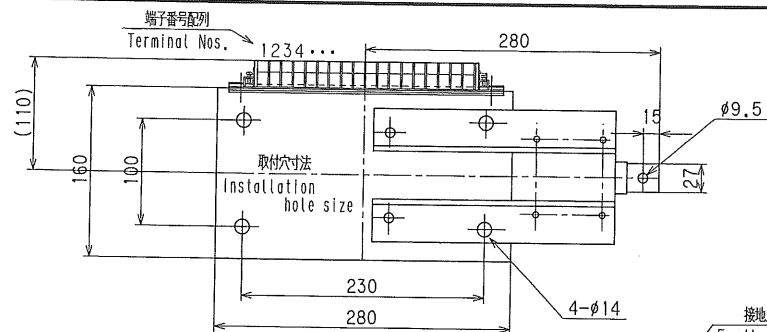


断路器仕様 Specification

電磁操作式 Electromagnetic operation type	始動電流 Starting current (1φ 200V 40A+10A) 保持電流 Maintenance current (1φ 200V 1.8A+0.65A)
冷却方式 Cooling system	自 冷 Self cooling
極数相数 Type of action	単 極 単 投 1-Poles Single action
絶縁階級 Class of insulation	3 B
定格電流 Rated current	50/60Hz 2500A 150/180Hz 2000A 500Hz 1800A 1000Hz 1500A 3000Hz 1200A
接触部仕上 Terminal coating	銀メッキ Electroplated coatings of Silver
端子部仕上 Terminal coating	銀メッキ Electroplated coatings of Silver
質量 Total weight	38kg


※取扱上の注意 Attention on handling

取付方向 Installed direction	上向のみ Only upward
許容端子荷重 Allowable load that hangs in terminal	先端で10kg以下 10kg or less in the point
接続導体 Connected conductor	可変性があること Be flexible
配線範囲 Range of wiring	ベースより上に配線する場合はセンターより350以内は不可 when wiring above the base within 350mm
その他 Others	ケーブルサポートが必要です it is necessary to support the cable

概念結線図 Concept circuit chart



端子番号 Terminal Nos.

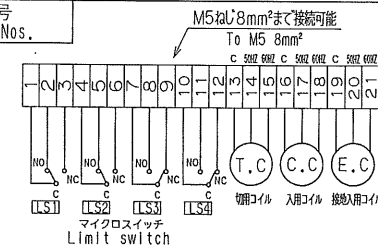

本図面状態(ON)における接点状況を示す
Contact position as shown assembly drawing

L, Sフローチャート FLOW CHART		接点閉 Contact Close	
L, S 符号 L, S terminal Nos.	D, S 状態 D, S Position	ON	OFF
L, S 1	1-2	ON	OFF
	1-3	ON	OFF
L, S 2	4-5	ON	OFF
	4-6	ON	OFF
L, S 3	7-8	ON	OFF
	7-9	ON	OFF
L, S 4	10-11	ON	OFF
	10-12	ON	OFF

単極単投断路器

Appearance of Disconnecting Switch
接地装置付 With earthing device
GC-25E

Dwg. No.

FAE004C